

R MZO SERIES




MZO **boat**




One boat for all your missions...

- Dive Rescue/Recovery
- Firefighting
- Flood Evacuation/Rescue
- Patrol/Security Enforcement
- Surface Recovery
- Swiftwater Rescue
- K9 Search and Rescue
- Incident Command/Staging

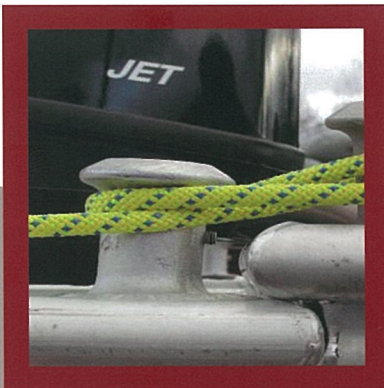

Exclusive ONELink System

Allows multiple R ONE Series boats to interconnect. ONELink creates a quick rigid connection in multiple configurations and disconnects in seconds.

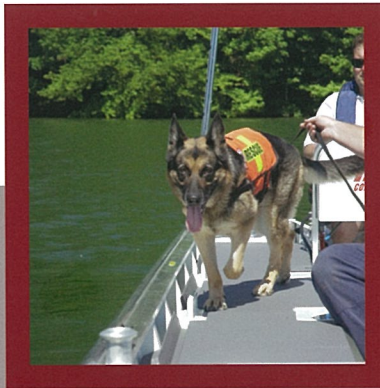

K9 Walkways

Custom fit nonskid panel system enable K9 units unobstructed access to the water. Keeps them safe and focused on the task at hand.




Floating Sea Boxes

Removable floating boxes can be used as flotation/rescue devices or deployed to create more working area.



Double Stack Trailer

Always bring all the water gear you might need to every mission. Saves room at the station, too.

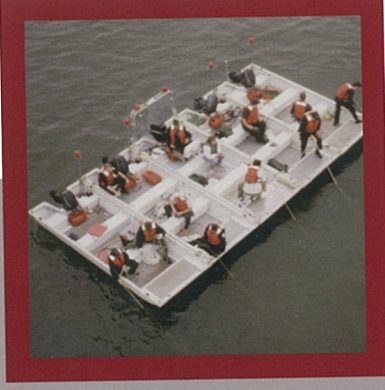

Connect Multiple R ONE Series

Creates a stable platform for surface recovery, dragging, site management, or evacuation. Connects and disconnects in seconds.




Exclusive Dive & Rescue Platform

Deployable in-water platform makes rescue/recovery and dive/K9 operations safe and convenient. The platform folds into the boat when underway.




The Original Connector-style Boat

- Connectable
- Versatile
- Stable
- Safe
- Durable
- Rapidly Deployable
- Shallow-water Capable
- Diver and K9 Unit Friendly

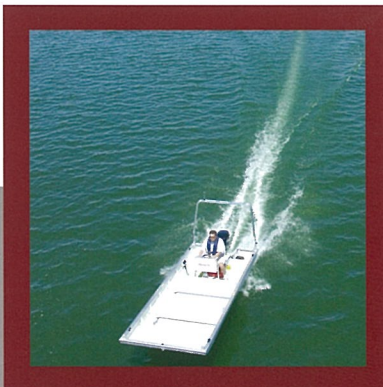

Speed When You Need It

R ONE Series boats have a top speed of 38 mph, getting you to - and from - the scene quickly.

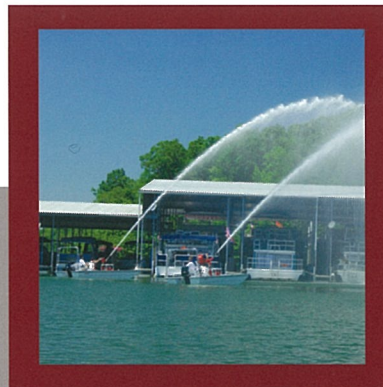

Portable Fire Pump

Portable yet powerful, the removable fire pump converts your R ONE Series boat into a waterfront firefighting resource.



Trusted Worldwide

Across the country and around the world, first responders rely on the R ONE Series boat to be the one boat for every mission.



Since 1992, the R ONE Series connector-style boat has had one mission - to be the one boat for all your missions. Our American-made boats are the safest, most versatile and effective inland-water response boats. Period.

Purpose-built for versatility, they serve across the country and around the world as the industry's most stable rescue and recovery boat, a highly maneuverable dive platform, and a water-based firefighting tool.

Connect two or more together with our exclusive ONELink system, and your options multiply.

- 5052 marine aluminum construction
- Draft of inches
- Ultra-stable
- Situation-tested in the most demanding conditions



SPECIFICATIONS

R ONE Series 1660

	U.S.	Metric
Length	16'3"	4.87 m
Beam	6'3"	1.87 m
Side Depth (Outside)	21"	53 cm
Interior Operation Space (Seatool Boxes Removed)		
Interior Operation Space	62 sqft	5.67 m ²
Draft	6"	15.24 cm
Max Recommended Capacity	1125 lbs.	510 kg
Buoyant Material	19 cuft	538,000 cm ³
Maximum Speed	38 mph	61 kph
Maximum Horsepower	50 hp	50 hp
Single Boat and Trailer		
Length	20'2"	6.1 m
Width	7'9"	2.3 m
Height	8'3"	2.5m
Double Stack Dual Axel Trailer		
Length	24'5"	7.4 m
Width	7'9"	2.3 m
Height (Trailer Only)	8'4"	2.5 m
Height (w/R ONE Series on top rack)	9'7"	2.9 m
Weight Capacity	3,000 lbs.	1,360 kg
Inside Runner Width	37.25"	94.25 cm

Top rack lowered via electric winch, each rack supports up to a 16' craft. Surge brakes with safety cable, 2" trailer coupling, spare tire and battery.

Motor Options

Mercury	Yamaha	Evinrude
Propeller	Propeller	Propeller
Jet	Jet	Jet Pump

Accessories

Dive/Rescue Platform - All-welded anodized aluminum construction. Removable and easily attaches to bow. While underway, the dive/rescue platform folds into the boat. When lowered, it is at least 18" (45.72 cm) below water surface for easy entry into boat.

Light Bar Mount - All-welded anodized aluminum construction. Removable and attaches at stern. 6" double reinforced tubing in both ends to support search/navigation lights or light bars.

Center Console - Steering wheel, fixed seat and remote engine controls. Mounted to the transom to maximize work area in the center and forward areas.

Fire Pump System - Self-contained, portable/removable 500 gpm fire pump system. Includes pump, custom frame, suction hose with strainer and monitor.

ONELink System

Exclusive ONELink System allows R ONE Series boats to connect in a variety of configurations to fit mission needs. Stable and rigid while connected, boats can be separated in just seconds.



www.rescueone.com

info@theoneboat.com

800.737.2831

R ONE iSERIES INFLATABLE BOATS


380 / 430 / 470 SERIES

R ONE iSERIES


(800) 737-2831

WWW.THEONEBOAT.COM

SOLAS™ REFLECTIVE
SAFETY PANELS

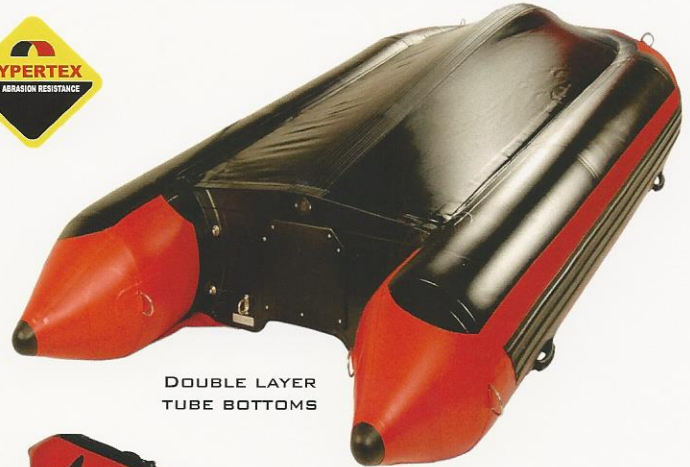

DOUBLE LAYER
TUBE BOTTOMS



Standard Features:

- * Pressure relief valves to prevent over inflation
- * Low maintenance aluminum sectional floor
- * Multiple Cargo attachment points
- * External carry handles for easy transport and launching
- * Double layered tube reinforcements for additional protection
- * Interior grab ropes for easy Tactical exit/entry
- * Molded Transom with dual motor plates
- * 1100-denier reinforced Hypertex™
- * Deep inflatable V-keel with a rub strake protector
- * Self bailing drain system
- * Transom "D" lifting rings (all stainless hardware)
- * Includes Storage bag / Seats / Oars / Foot pump / Repair kit



(OPTIONAL)
QUICK FILL KIT
LEAFIELD VALVES #QFC7


SPECIFICATIONS:

MODEL	LENGTH (FT/IN)	BEAM (FT/IN)	WEIGHT	AIR CHAMBERS	TUBE SIZE	CAPACITY (LBS/PERS)	MAX HP (WEIGHT)	SHAFT LENGTH	STORAGE SIZE (IN)
JP-380-SR	12' 6"	5" 8"	216 LBS	5+KEAL	18"	1720 / 6	30 HP / 165 LBS	SHORT (15")	55"x28"x26"
JP-430-SR	14' 2"	6" 5"	253 LBS	5+KEAL	20"	2395 / 8	40 HP / 185 LBS	SHORT (15")	56"x30"x28"
JP-470-SR	15' 6"	6" 5"	275 LBS	5+KEAL	20"	2640 / 10	50 HP / 225 LBS	LONG (20")	56"x30"x30"

PACKAGES

D DELUXE

- ▶ 1660 Connector Style Boat
- ▶ 1000 Transport Trailer with Spare
- ▶ Mercury 40HP 4 Stroke Propeller Driven, Electric Start, Power Tilt / Trim Outboard
- ▶ Command Console
- ▶ Dive / Rescue Platform
- ▶ Light Bar Mount

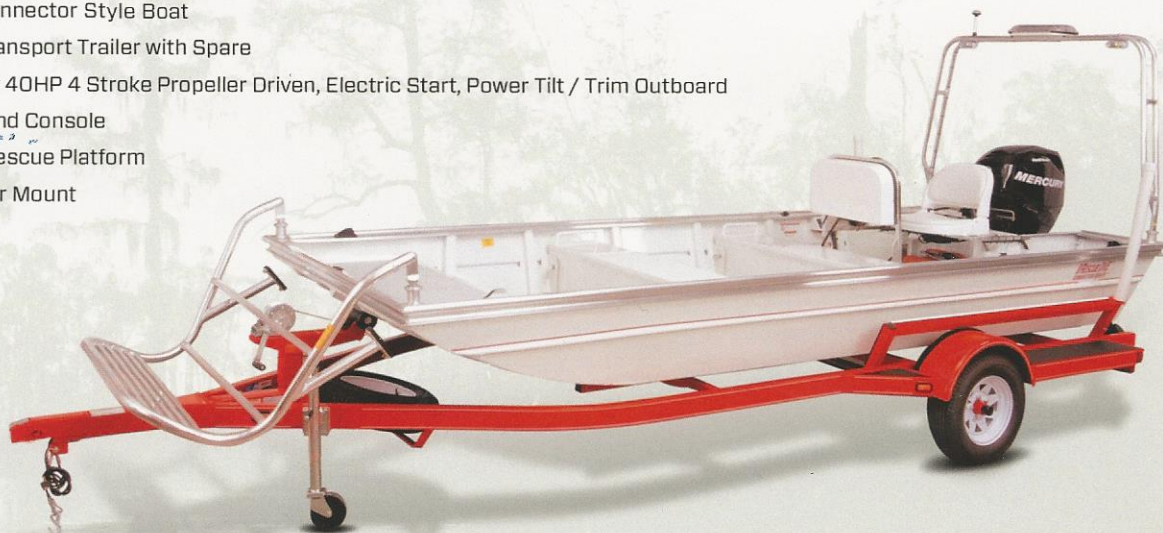

C COMPLETE WATER RESCUE

- ▶ 1660 Connector-Style Boat
- ▶ Mercury 40HP 4 Stroke Propeller Driven, Electric Start, Power Tilt/Trim Outboard
- ▶ Command Console
- ▶ Dive / Rescue Platform
- ▶ Light Bar Mount
- ▶ 43ORS Inflatable Rescue Boat
- ▶ Mercury 25hp 4 Stroke Propeller Driven, Manual Start, Tiller Steering Outboard
- ▶ 2000 Transport Trailer with Spare and Motor Mount

I INFLATABLE 43ORS PACKAGE

- ▶ 43ORS Inflatable Package
- ▶ 500 Transport Trailer with Spare
- ▶ Mercury 25hp 4 Stroke Propeller Driven, Manual Start, Tiller Steering Outboard

RNO
SERIES

800.737.2831

SALES@THEONEBOAT.COM

THEONEBOAT.COM

2000 Double Stack



FLEXIBLE, DUAL TRANSPORT SYSTEM
FOR YOUR ONE BOAT RESCUE BOATS

FEATURES

- CUSTOM DESIGNED FOR R ONE SERIES & R ONE I SERIES
- DUAL AXLE WITH 1.5 TON CAPACITY
- EACH RACK SUPPORTS 16' CRAFTS
- ELECTRIC WINCH FOR LOWERING TOP RACK
- SURGE BRAKES WITH SAFETY CABLE
- SPARE TIRE AND BATTERY INCLUDED

CALL OR EMAIL US FOR A QUOTE
800-737-2831 | sales@theoneboat.com

SPECIFICATIONS

The 2000 Double Stack Transport Trailer is designed to transport either 2 ONE Boat R ONE Series Boats or a combination of R ONE Series and R ONE i Series Inflatable Boats. However, the configuration can be modified for personal watercraft, other inflatable rescue boats or water rescue equipment.



FLEXIBLE DUAL TRANSPORT SYSTEM

SPECIFICATIONS

- LENGTH: 25' / 7.6 M
- WIDTH: 7'4" / 2.2 M
- HEIGHT (TRAILER ONLY): 8'7" / 2.6 M
- HEIGHT (W/R ONE SERIES): 10'1" / 3 M
- INSIDE RUNNER WIDTH: 37.25" / 94.62 CM
- CAPACITY: 3000 LBS / 1360 KG
- ELECTRIC WINCH
- DUAL AXLE
- SURGE BRAKES WITH SAFETY CABLE
- SPARE TIRE AND BATTERY INCLUDED
- DUAL MOUNTS FOR MOTOR TRANSPORT
- 1 YEAR WARRANTY

The 2000 DOUBLE STACK Transport Trailer
by ONE Boat Rescue Boats